

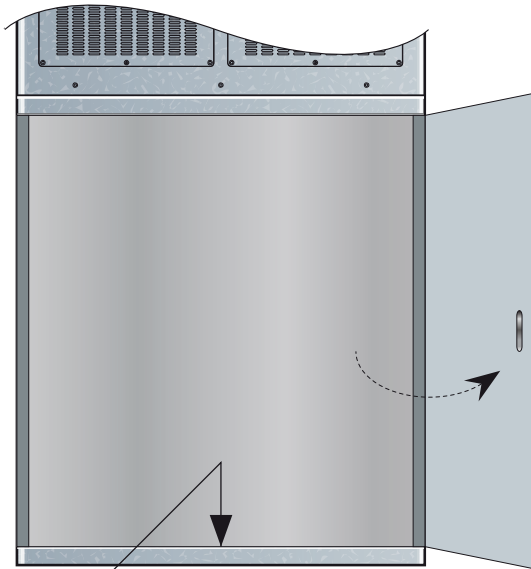


QUICK INSTALLATION GUIDE


Rear View

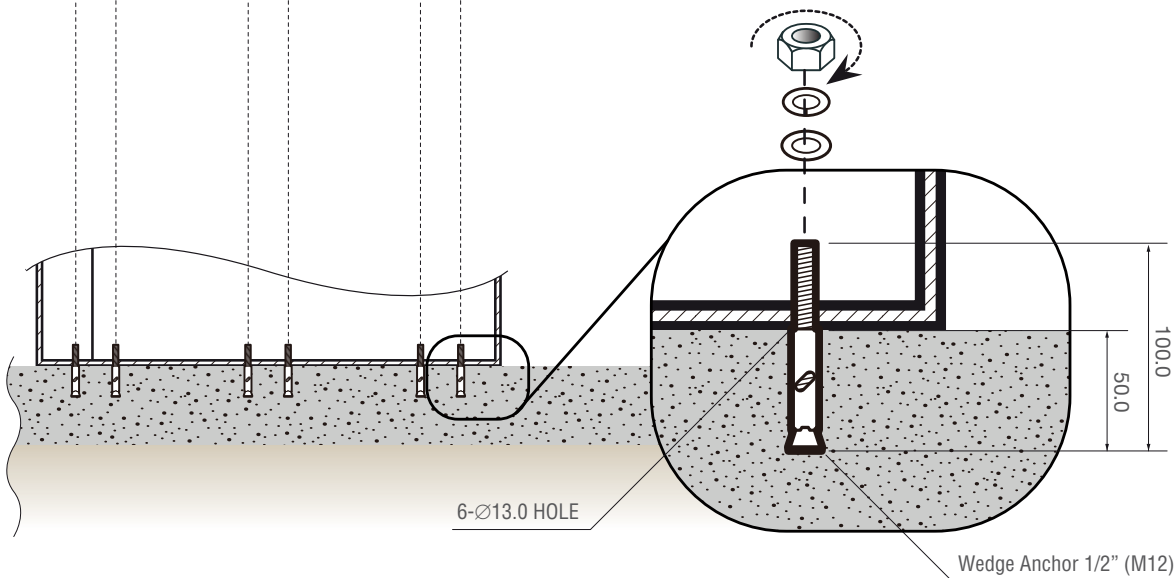

Bottom View

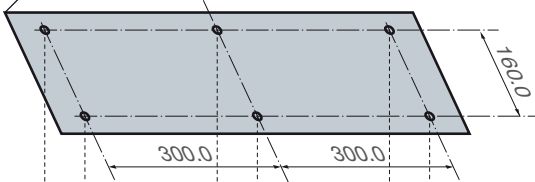

Internal port in the upper console box

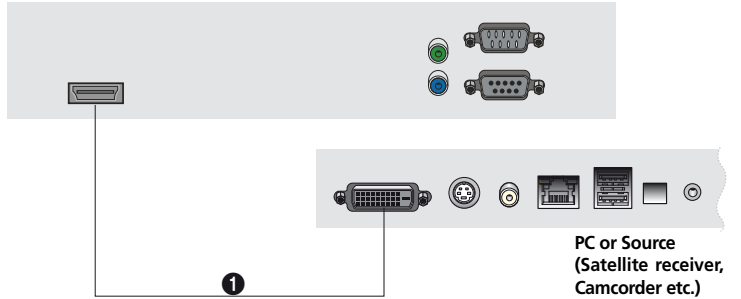

1. Connect signal and power code under poweroff PC located in console box in the bottom of product.

❶ In case connecting HDMI in-put cable with DVI out-put : You can use when the peripherals with DVI output are connected.

2. Connect power code with product.

3. Turn on the product. The display will operate within 10 seconds.

! It might happen to not work display if connecting signal cable with PC turning on.

(In case of not display, display will work well if press "ALT + CNTL + F4" of keyboard at the same time.)

Surely, check connection signal cable with correct before turning on PC. All the time, turn-off or turn-on the console box power of the top of product and PC power inside bottom console box.

* Above mentioned is related with PC NDSi161 model only.

! Product is installed at where the place is clean and product does not sink under water even though heavy raining. It must be installed at where water does not flood at least over the bottom of the product.

Dustproof Filter Exchange

1. For your safety, please turn off the power before replacing the filter.
 2. To prevent the influx of foreign substances, ensure to keep the surrounding areas clean.
 3. Both the front and rear of filter could be different depending on inserting direction.
- Please refer to the figure below, and proceed the replacement with careful attention to the color of filter frame and direction.

! The recommended Dustproof Filter replacement cycle is every eight months, and the replacement cycle may vary at the installation environment.

FILTER FRAME COLOR



GREEN



BLACK

방진필터 교환하기

1. 필터 교환 전에는 안전을 위해 반드시 제품의 전원을 꺼주십시오.
2. 이물질 유입 방지를 위해 미리 주변을 청결하게 유지하십시오.
3. 필터가 삽입되는 위치에 따라 필터의 앞뒤 방향이 달라집니다. 아래 그림을 참조하여 필터의 테두리 색상 및 표시된 화살표 방향에 유의하여 교체하여 주십시오.

! 권장되는 방진필터의 교체주기는 8개월이며, 설치장소의 환경적인 요인으로 교체주기는 달라질 수 있습니다.

필터 테두리 색상



녹색



검정

